



Hose Carrier HC

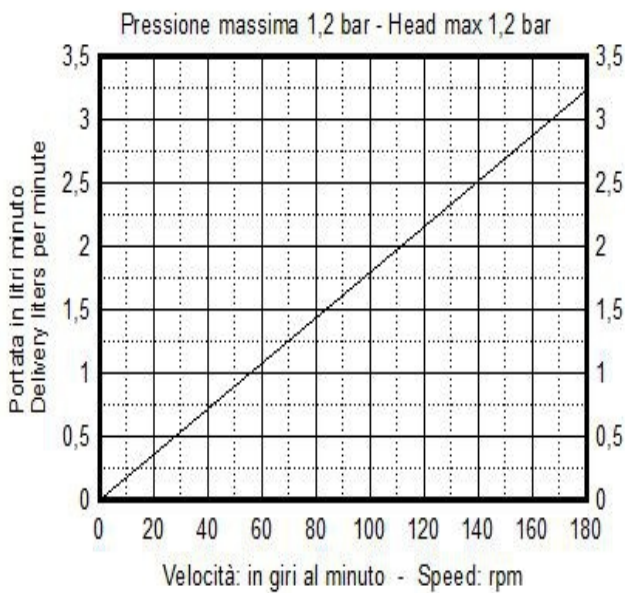

VERSIONS AVAILABLE
Variables with mechanical speed variator, from 1:5
Variable electronic inverter integrated IP 56
Trailers for slow hand towing in site
Electrical control panels

TECHNICAL DATA	
Delivery max	195 l/hour
Head max	1,2 bar
Vacuum	0,8 bar
Delivery per revolution	0,018 liter
Barb hose	DN 15
Free passage	9 mm
Weight	
Power Kw	0,09 – 0,18
Tube available in different materials	TPK
	SIL
	VIT
Leakage sensor	Option
Cooling device	Option
Different connections	Option

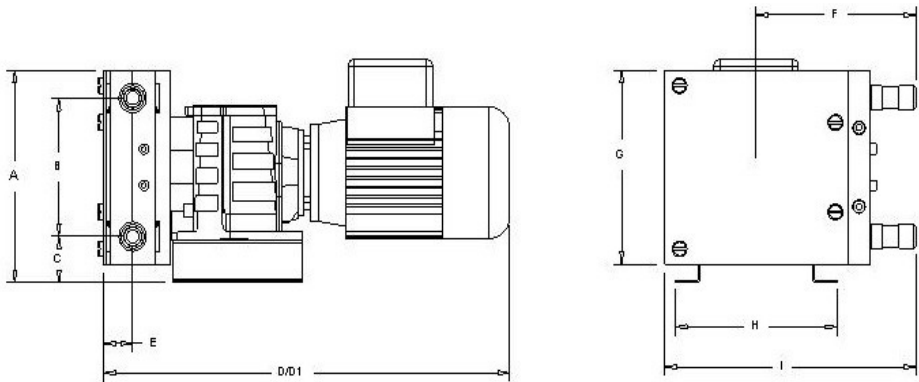

DIMENSIONS											
A	B	C	D	D1(VAR)	E	F	G	H	I	Out/In	Weight
165	98	46	348	450	20	110	140	125	180	DN15	

The dimensions are not binding and can vary without notice