


Hose Carrier HCP

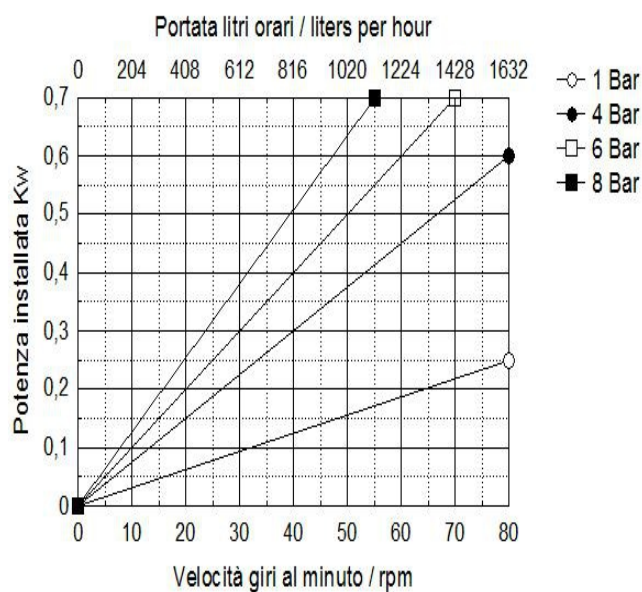


TECHNICAL DATA	
Delivery max	1650 l/Hour
Head max*	10 bar
Vacuum	0,95 bar
Delivery per revolution	0,34 Liters
Barb hose	DN 32
Free passage	25 mm
Weight	
Power Kw	0,37-0,75
Hose fiber reinforced available in different materials	NR
	NBR
	HYP
	EPDM
	NRA
Leakage sensor	Option
Cooling device	Option
Different connections	Option

VERSIONS AVAILABLE

Variables with mechanical speed variator, from 1:5
Variables with electronic inverter integrated IP 65
Variabili con inverter elettronico integrato IP 65
Trailers for slow hand towing in site
Electrical control panels aboard the machine

Note: in the presence of fluids particularly viscous, suspensions coarse solid, high delivery pressure, high temperatures, consider operate not more than 30 % of the maximum flow rate of the pump.
*According to the transmission applied

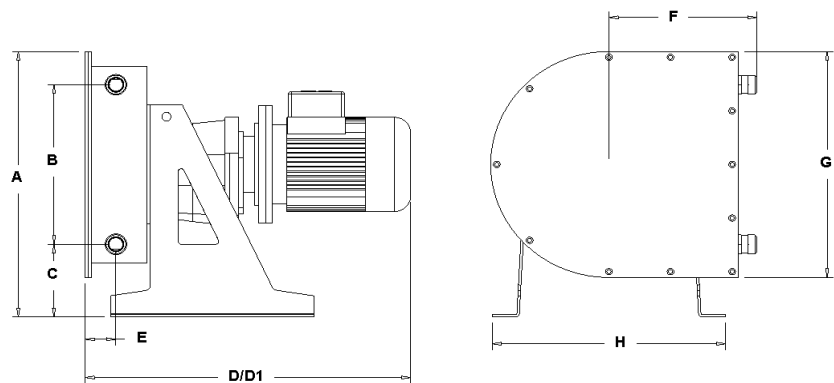

DIMENSIONS											
A	B	C	D	D1(VAR)	E	F	G	H	I	Out/In	Weight
450	272	123	530	660	50	240	384	380	-	DN 32	

The dimensions are not binding and can vary without notice