



Hose Carrier HCP

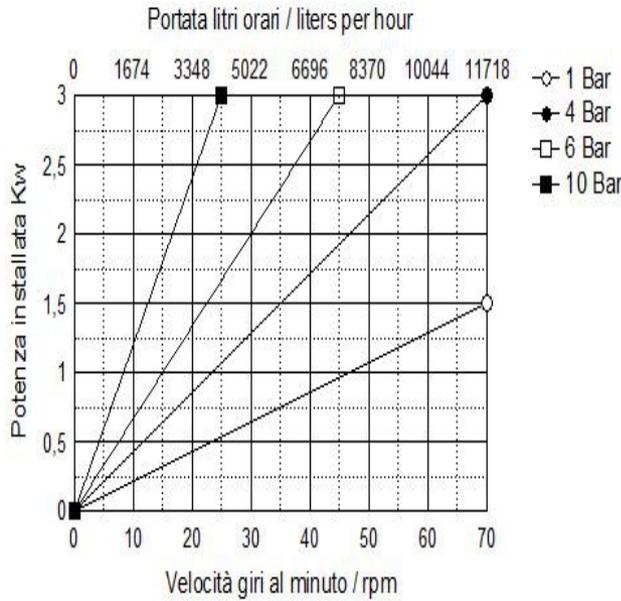

| TECNICAL DATA | |
|--|--------------|
| Delivery max | 12000 I/HOUR |
| Head max* | 10 bar |
| Vacuum | 0,95 bar |
| Delivery per revolution | 2,79 liters |
| Barb hose | DN 60 |
| Free passage | 50 mm |
| Weight | |
| Power Kw | 1,0-3,0 |
| Hose fiber reinforced available in different materials | NR |
| | NBR |
| | HYP |
| | EPDM |
| | NRA |
| Leakage sensor | Option |
| Cooling device | Option |
| Different connections | Option |

| VERSIONS AVAILABLE |
|--|
| Variables with mechanical speed variator, from 1:5 |
| Variable electronic inverter integrated IP 65 |
| Trailers for slow hand towing in site |
| Electrical control panels aboard the machine |

Note: in the presence of fluids particularly viscous, suspensions coarse solid, high delivery pressure, high temperatures, consider operate not more than 30 % of the maximum flow rate of the pump. *According to the transmission applied

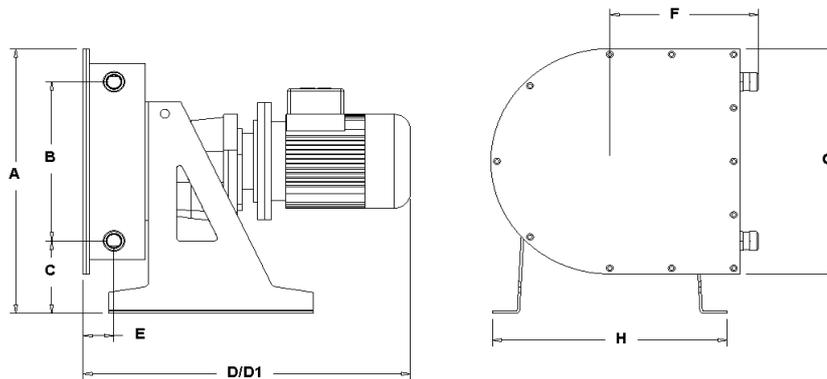

| DIMENSIONS | | | | | | | | | | | |
|------------|-----|-----|-----|---------|----|-----|-----|-----|---|--------|--------|
| A | B | C | D | D1(VAR) | E | F | G | H | I | Out/in | Weight |
| 780 | 524 | 170 | 723 | 931 | 81 | 418 | 696 | 598 | - | DN 60 | |

Le dimensioni non sono impegnative e possono variare senza avviso

STELLA OM SAS
Via Manzoni 46
20080 VERMEZZO
Italy
Ph. +39 (0)2 9440839
Fax +39 (0)2 9440386
stellaom@virgilio.it