



Hose Carrier HCP

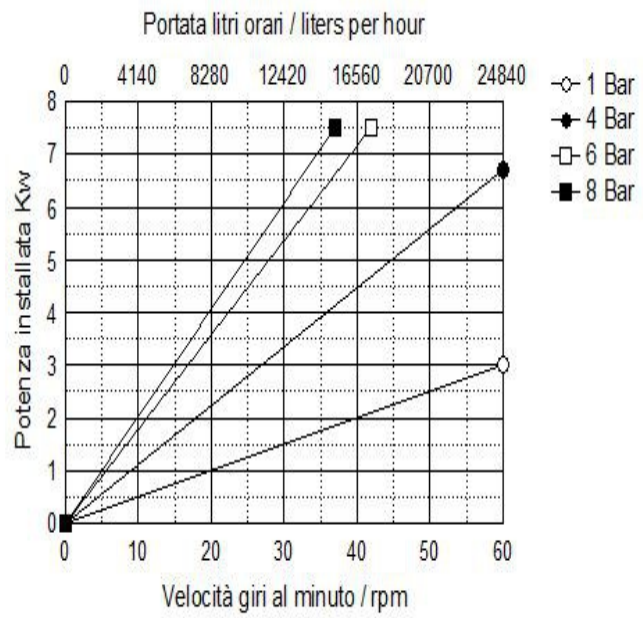

TECHNICAL DATA	
Delivery max	24800 L/hour
Head max*	8bar
Vacuum	0,95 bar
Delivery per revolution	6,9 liters
Barb hose	DN 80
Free passage	65 mm
Weight	
Power Kw	3,0-7,5
Hose fiber reinforced available in different materials	NR
	NBR
	HYP
	EPDM
	NRA
Leakage sensor	Option
Cooling device	Option
Different connections	Option

VERSIONS AVAILABLE
Variables with mechanical speed variator, from 1:5
Variable electronic inverter integrated IP 65
Trailers for slow hand towing in site
Electrical control panels aboard the machine

Note: in the presence of fluids particularly viscous, suspensions coarse solid, high delivery pressure, high temperatures, consider operate not more than 30 % of the maximum flow rate of the pump. *According to the transmission applied

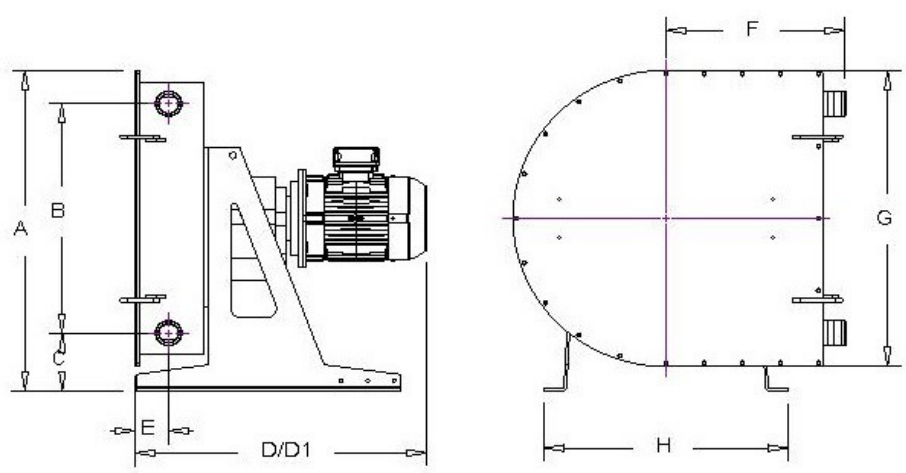

DIMENSIONS											
A	B	C	D	D1(VAR)	E	F	G	H	I	Out/in	Weight
995	712	178	876	1376	101	537	920	732	-	DN 80	

The dimensions are not binding and can vary without notice